

# Nuvo-7160GC Series

Ruggedized GPU-Computing Platform Supporting 120W NVIDIA® GPU and Intel® 8th/9th-Gen Core™ Processor



CE FC

## Key Features

- Supports NVIDIA® GPU graphics card up to 120W TDP
- Patented thermal design to allow -25°C to 60°C\* Wide temperature operation
- Intel® 8th/ 9th-Gen Core™ hexa-core 65W/ 35W LGA1151 CPU
- 6x GigE ports, supporting 9.5 KB jumbo frame
- M.2 2280 M key socket (Gen3 x4) supporting NVMe SSD or Intel® Optane™ memory
- 4x USB 3.1 Gen2 ports and 4x USB 3.1 Gen1 ports
- Accommodates two 2.5" SATA HDD/ SSD with RAID 0/ 1 support
- Compatible with MeziO™ interface for function expansion
- Patented ventilation design\* for graphics card

contattaci

\*R.O.C Patent No. M534371/ M456527

## Introduction

Nuvo-7160GC is a ruggedized GPU-aided edge computer designed for modern machine learning applications such as autonomous driving, facial recognition and machine vision. It supports up to a 120W GPU, delivering 4~6 TFLOPS computing power for inference, as well as Intel® 8th/ 9th-Gen Core™ 6-core/ 8-core CPU, offering up to 50% CPU performance enhancement over previous generations.

Thanks to Neosys' patented Cassette design and ingenious ventilation mechanism, Nuvo-7160GC can effectively dissipate the heat generated by the GPU. By introducing the guided airflow from intake to exhaust with powerful fans featuring smart fan control, it allows a 120W GPU to operate at 60°C ambient temperature under 100% GPU loading.

Nuvo-7160GC incorporates rich I/O functions such as USB 3.1 Gen2/ Gen1, GbE, COM and MeziO™ interface in its restricted footprint. It also leverages cutting-edge M.2 NVMe SSD technology for over 2000MB/s disk read/ write speed or Intel® Optane™ memory for the ultimate system acceleration. Neosys Nuvo-7160GC is the ideal solution for emerging edge computing by combining exceptional CPU and GPU performances.


## Specifications

System Core		Internal Expansion Bus	
<b>Processor</b>	Supporting Intel® 8th/ 9th-Gen CPU (LGA1151 socket, 65W/ 35W TDP) - Intel® Core™ i7-8700/ i7-8700T/ i7-9700E/ i7-9700TE - Intel® Core™ i5-8500/ i5-8500T/ i5-9500E/ i5-9500TE - Intel® Core™ i3-8100/ i3-8100T/ i3-9100E/ i3-9100TE	<b>PCI/PCI Express</b>	1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette for installing an NVIDIA® graphics card up to 120W TDP (Max. graphics card dimension is 188 mm(L) x 121 mm(W), dual slot allocation)
<b>Chipset</b>	Intel® Q370 platform controller hub	<b>Mini PCI Express</b>	1x full-size mini PCI Express socket with internal SIM socket (mux with mSATA)
<b>Graphics</b>	Integrated Intel® UHD graphics 630	<b>M.2</b>	1x M.2 2242 B key socket with dual front-accessible SIM sockets, supporting dual SIM mode with selected M.2 LTE module
<b>Memory</b>	Up to 64 GB DDR4 2666/ 2400 SDRAM (two SODIMM slots)	<b>Expandable I/O</b>	1x MeziO™ expansion port for Neosys MeziO™ modules
<b>AMT</b>	Supports AMT 12.0	<b>Power Supply</b>	
<b>TPM</b>	Supports TPM 2.0	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8~35VDC DC input
<b>I/O Interface</b>		<b>Remote Ctrl. &amp; LED Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output
<b>Ethernet</b>	6x Gigabit Ethernet ports by I219 and 5x I210	<b>Mechanical</b>	
<b>PoE+</b>	Optional IEEE 802.3at PoE+ PSE for Port 3 ~ Port 6 100 W total power budget	<b>Dimension</b>	240 mm (W) x 225 mm (D) x 111 mm (H)
<b>USB</b>	4x USB 3.1 Gen2 (10 Gbps) ports 4x USB 3.1 Gen1 (5 Gbps) ports	<b>Weight</b>	4.5 Kg
<b>Video Port (Integrated Graphics)</b>	1x VGA connector, supporting 1920 x 1200 resolution 1x DVI-D connector, supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution	<b>Mounting</b>	Wall-mount bracket
<b>Serial Port</b>	2x software-programmable RS-232/422/485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	<b>Environmental</b>	
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out	<b>Operating Temperature</b>	<b>With 35W CPU and 120W GPU</b> -25°C ~ 60°C ** <b>With 65W CPU and 120W GPU</b> -25°C ~ 60°C **/*** (configured as 35W TDP) -25°C ~ 50°C **/*** (configured as 65W TDP)
<b>Storage Interface</b>		<b>Storage Temperature</b>	-40°C ~ 85°C
<b>SATA HDD</b>	2x internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1	<b>Humidity</b>	10%~90% , non-condensing
<b>M.2</b>	1x M.2 2280 M key socket (PCIe Gen3 x4) for NVMe SSD or Intel® Optane™ memory installation	<b>Vibration</b>	Operating, MIL-STD-810G, Method 514.6, Category 4
<b>mSATA</b>	1x full-size mSATA port (mux with mini-PCIe)	<b>Shock</b>	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
		<b>EMC</b>	CE/FCC Class A, according to EN 55032 & EN 55024


\*\* For i7-8700 and i7-9700E running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.

\*\*\* For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

## Appearance

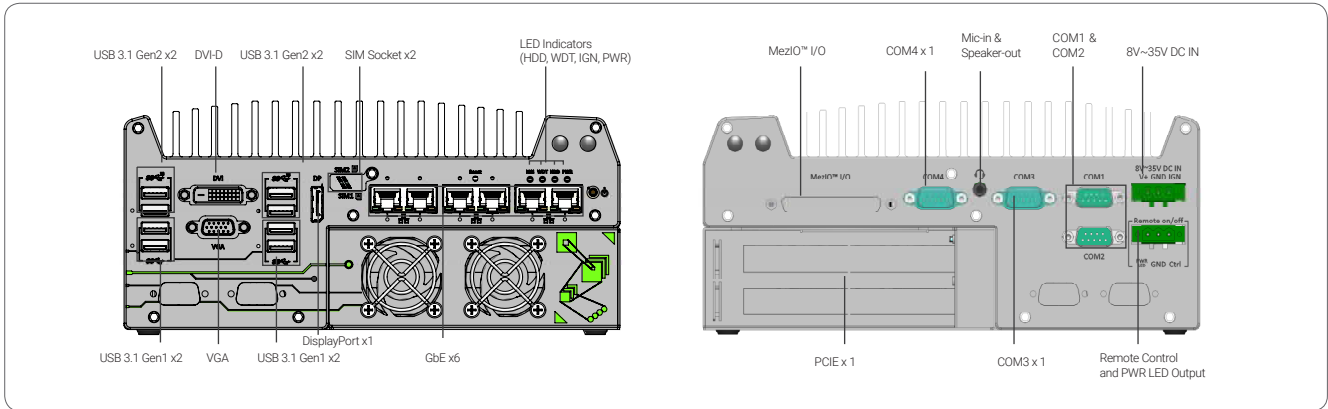

## Dimensions

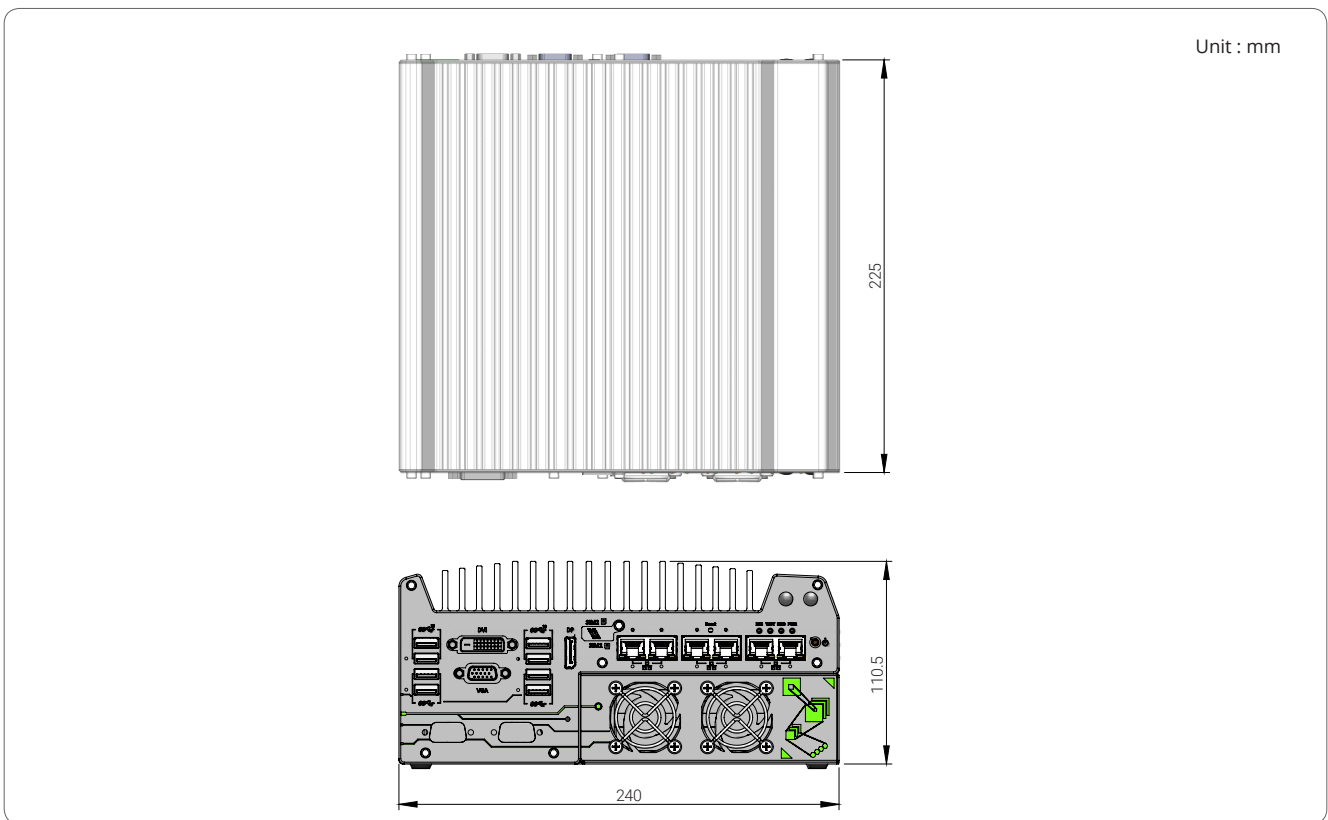

## Ordering Information

Model No.	Product Description
Nuvo-7160GC	Intel® 8th/9th-Gen Core™ GPU-computing platform with 6x GbE and MeziO™ interface, supporting selected NVIDIA® 120W GPU
<i>Optional IEEE 802.3at PoE+ for GbE ports 3 ~ 6</i>	

## Optional Accessories

PA-280W-ET2	280W AC/DC power adapter 24V/11.67A; 16AWG/100cm; cord end terminals for terminal block, operating temperature : -30°C to 60°C.
Damping bracket	Neusys' patented damping bracket assembly for Nuvo-7160GC/ Nuvo-7164GC

### MeziO™ Modules

<b>MeziO™-C180</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports	<b>MeziO™-V20-EP</b>	MeziO™ module with ignition power control function for in-vehicle application
<b>MeziO™-C181</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports	<b>MeziO™-U4</b>	MeziO™ module with 4x USB3.0 ports
<b>MeziO™-D220</b>	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output	<b>MeziO™-G4</b>	MeziO™ module with 4x GigE ports
<b>MeziO™-D230</b>	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output	<b>MeziO™-G4P</b>	MeziO™ module with 4x IEEE 802.3at PoE+ ports

Only Nuvo-7160-PoE support MeziO-G4P